


## 100ml Touch-up Tin Application Guide

This kit can be used to remove small but deep scratches or stone chips where the primer or metal work is exposed.

<b><u>LACQUER</u></b>	
<b><u>BASE COAT</u></b>	
<b><u>PRIMER</u></b>	
<b><u>STEEL</u></b>	

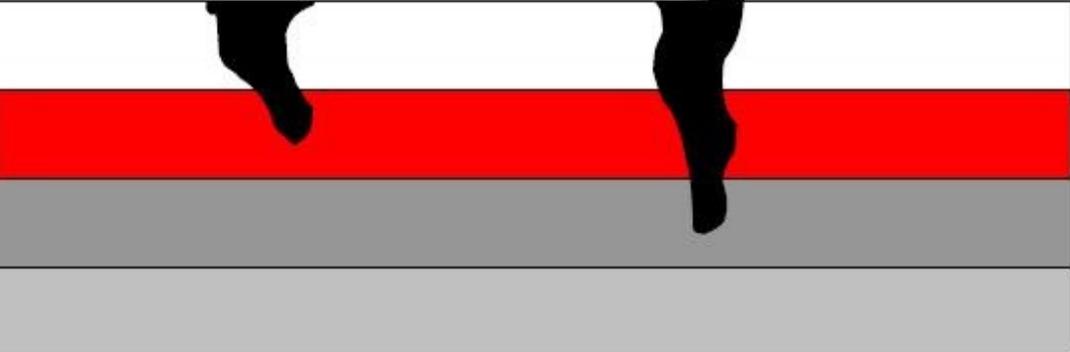

### **This Kit Contains:**

- 100ml Paint
- Application Brush

### **Step 1**

Thoroughly clean the area to be painted, removing any flaking paint or dirt.  
Ensure the area is thoroughly dry before proceeding.

### **Step 2**

Shake the touch-up tin thoroughly, ensuring that the paint is evenly mixed.  
Using the application brush, apply a thin layer of paint.  
Repeat after 30 minutes if needed.

***Please leave at least 24 hours for the paint to harden before polishing.***

### **Step 3**

We recommend that you polish the painted area with the rubbing compound such as G3 Liquid. This is done by applying a small amount of rubbing compound onto a cloth and gently rub the painted area in circular motions.

***PLEASE NOTE: The results from using the 100ml Touch-up Tin will depend entirely on the care taken by the user, please apply slowly and carefully taking as much time as needed.***